


INDUSTRIAL HOSES - general purpose

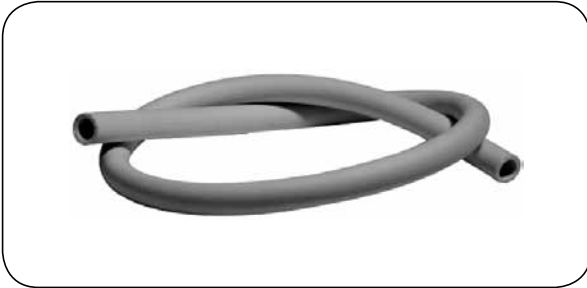

SOFT PLUS

Internal layer: Yellow (Y) or blue (BL) PVC
Reinforcement: Polyester braid
External layer: Yellow (Y) or blue (BL) PVC
Working temp.: From -25°C up to +60°C

Lightweight, ultra-flexible hose with excellent kink-resistance and no shape memory. Designed for air, water, slightly aggressive chemicals. Remains flexible in low temperatures. External layer is abrasion-resistant. Resistant to UV radiation and weather conditions. Hose material is free from cadmium and silicone, meets the requirements of RoHS. Standard length 20 m

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]	standard length [m]
SH-SOFTPLUS-06Y	6.3	11.8	20	60	15	0.093	100
SH-SOFTPLUS-08BL	8	12.5	20	60	25	0.086	100
SH-SOFTPLUS-09Y	9.5	15.1	20	60	30	0.129	100
SH-SOFTPLUS-10BL	10	15	20	60	35	0.117	100
SH-SOFTPLUS-12Y	12.7	18.5	20	60	35	0.170	100



SOFT PLUS / P

Internal layer: Yellow (Y) or blue (BL) PVC
Reinforcement: Polyester braid
External layer: Yellow (Y) or blue (BL) PVC
Working temp.: From -20°C up to +60°C

Pneumatic extension hose - complete hose assembly for air, produced from SOFT PLUS hose. Fitted with a brass socket and Eurostandard DN7.2 plug. Perfect solution for connecting pneumatic tools, dampens vibration.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	length [m]
SH-SOFTPLUS-P-06-10Y	6.3	11.8	20	60	10
SH-SOFTPLUS-P-08-10BL	8	12.5	20	60	10
SH-SOFTPLUS-P-09-10Y	9.5	15.1	20	60	10
SH-SOFTPLUS-P-10-10BL	10	15	20	60	10
SH-SOFTPLUS-P-12-10Y	12.7	18.5	20	60	10
SH-SOFTPLUS-P-06-15Y	6.3	11.8	20	60	15
SH-SOFTPLUS-P-08-15BL	8	12.5	20	60	15
SH-SOFTPLUS-P-09-15Y	9.5	15.1	20	60	15
SH-SOFTPLUS-P-10-15BL	10	15	20	60	15
SH-SOFTPLUS-P-12-15Y	12.7	18.5	20	60	15